

## Initialisation State Example - TriPt

Parameters	Std::map<std::string,int>	Human understandable values, eg, discriminator level
Registers	Std::map<int,int>	The register values
PrepareRegisters		Convert parameters into registers
Insert		
Get		

Programming Order



VME Command


1553 Command

Microchip Command

FPGA Command



Knowledge Order

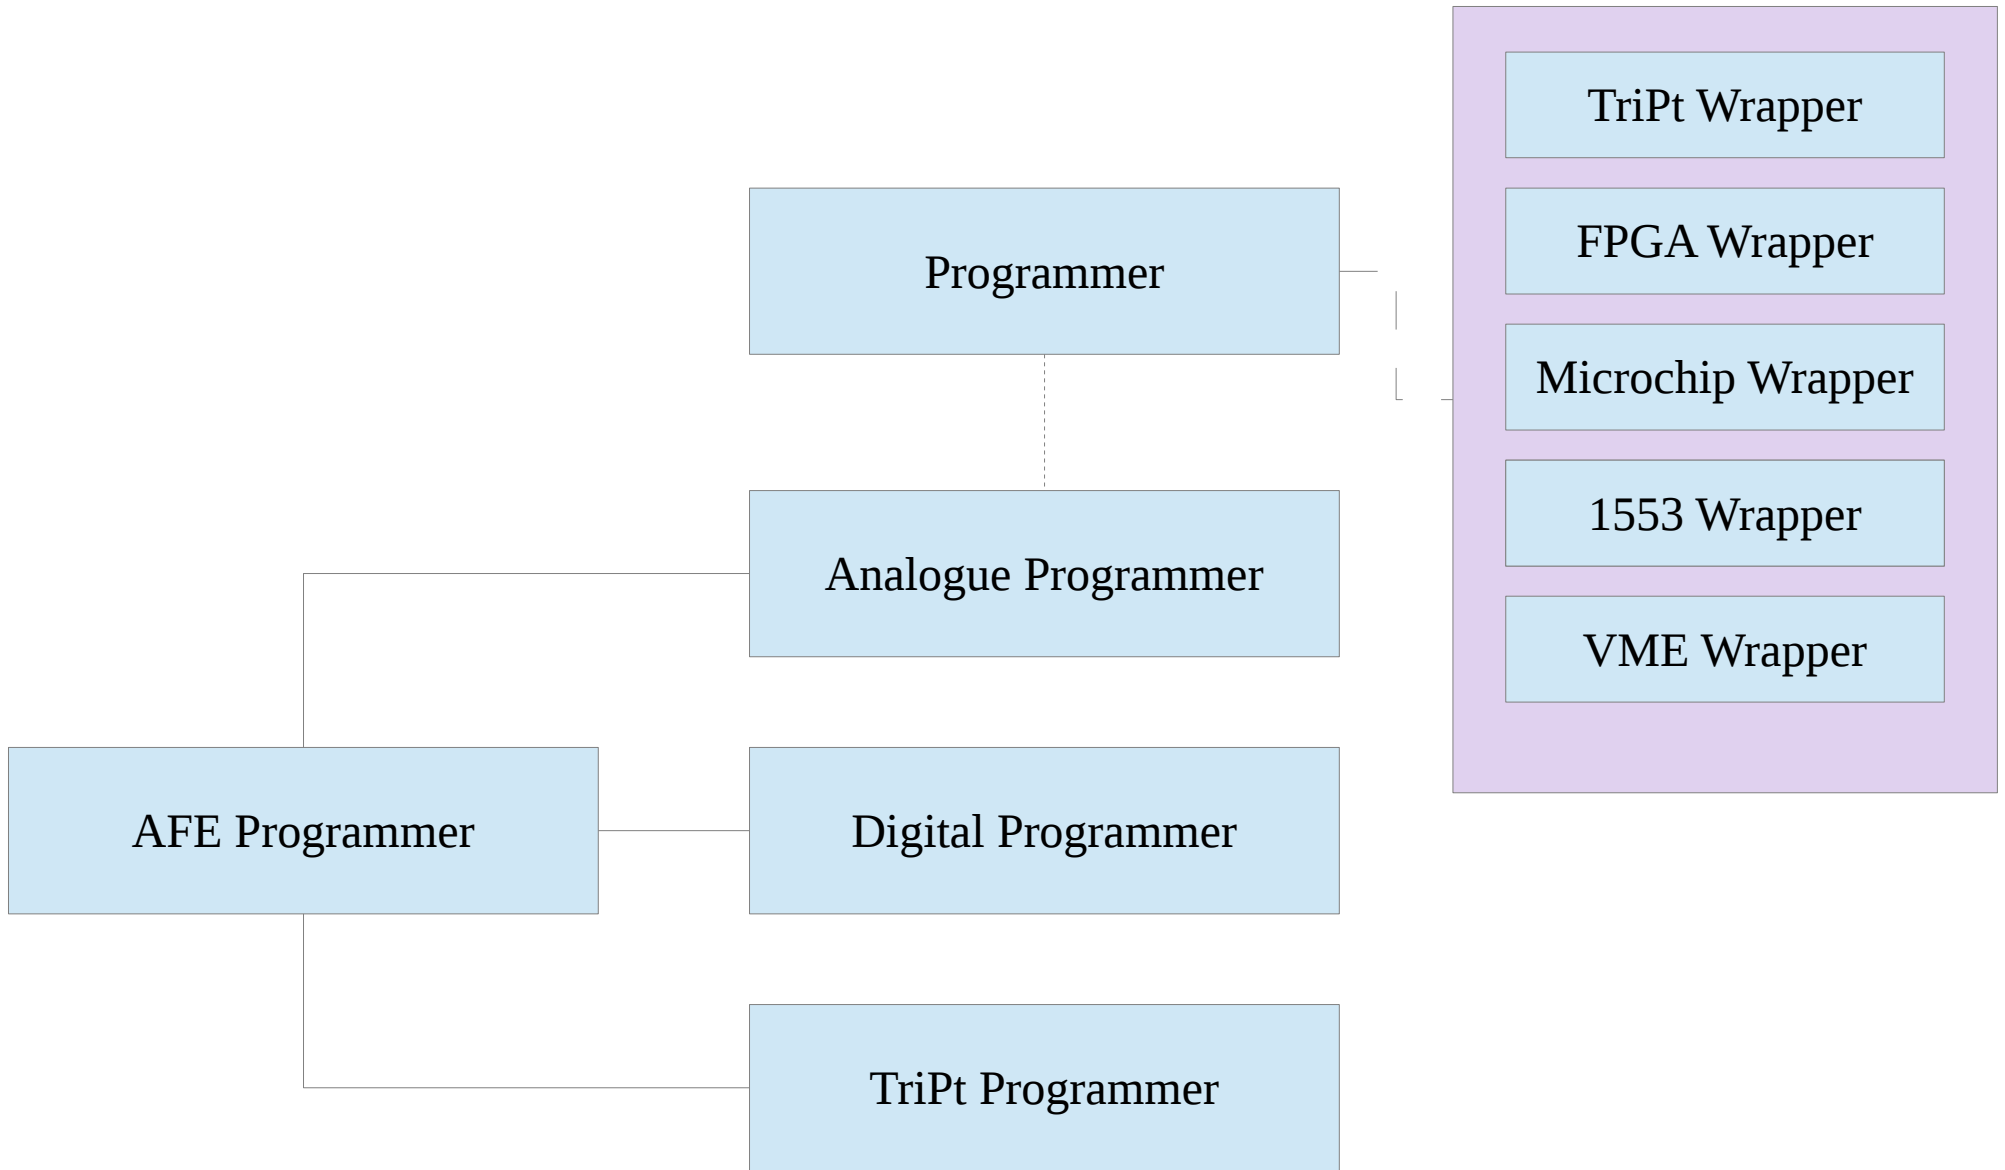

# Tracker timing

